




COMPACT 'E' CONVERSION KIT

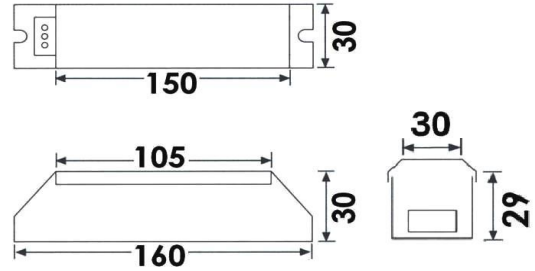

Dimensions (mm)

TECHNICAL DATA

Mode of Operation	:	Maintained.
Lamp	:	4-pin fluorescent lamp.
Operating Temperature	:	ta 40°C.
Mains Supply	:	230V AC 50/60Hz
Power Consumption	:	3VA
Battery	:	Maintenance-free High Temperature Nickel Cadmium.
Charger	:	Fully automatic constant current/dual-rate.
Charging Monitor	:	Ø 5mm Red LED.
Recharge Period	:	16 hrs.
Testing Facility	:	Push-off Test-switch for independent testing.
Emergency Duration	:	2 hrs/3 hrs.
Safety Feature	:	Low-voltage cut-off to prevent over-discharge of battery.
Construction	:	Electro-galvanised steel casing; epoxy powder coating.
Flammability Class	:	Self-extinguishing.
Weight	:	Module - 250gm; Battery - 370gm.
Compliance	:	SS 490 : Part 2 : 7 : 2001, IEC 61347-2-7.
Warranty	:	1 year.



PSB Listed Label



Class 1

MODEL	LAMP APPLICABLE
FL 140M-EV58	14-58 watt T5 fluorescent lamp

■ Specification subject to change without prior notice.