





SLIM EMERGENCY EXIT SIGN



Surface type



Surface dimensions (mm)

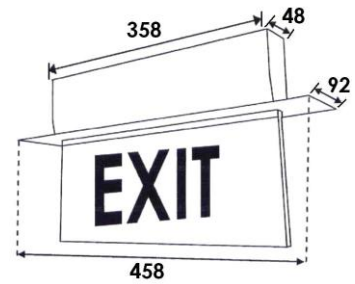

Recess dimensions (mm)

TECHNICAL DATA

Mode of Operation	:	Maintained.
Lamp	:	8 watt Fluorescent lamp.
Mains Supply	:	230V AC 50Hz
Power Consumption	:	12VA.
Battery	:	Maintenance-free High Temperature Nickel Cadmium.
Charger	:	Fully automatic constant current.
Charging Monitor	:	Ø 3mm Red LED.
Recharge Period	:	Less than 24 hrs.
Testing Facility	:	Micro-switch for independent testing.
Emergency Duration	:	2 hrs / 3 hrs.
Safety Feature	:	Low-voltage cut-off to prevent over-discharge of battery.
Construction	:	Electro-galvanised steel casing; epoxy powder coating.
Weight	:	2.7kg.
Installation	:	Ceiling, wall or pendant mounting.
Cable Entry	:	3 x 20mm Ø knockout hole.
Legend	:	White text over ISO green background.
Warranty	:	1 year.



PSB Listed Label



Class 1

MODEL		LEGEND
SURFACE TYPE	RECESS TYPE	
SSE 18M	SSE 18M (RECESS)	
SSE 18M-E	SSE 18M-E (RECESS)	
SSE 18M-T	SSE 18M-T (RECESS)	
SSE 18M-D (c/w 1 directional arrow)	SSE 18M-D (RECESS) (c/w 1 directional arrow)	

■ Specification subject to change without prior notice.