




LED RECESSED EMERGENCY LIGHT

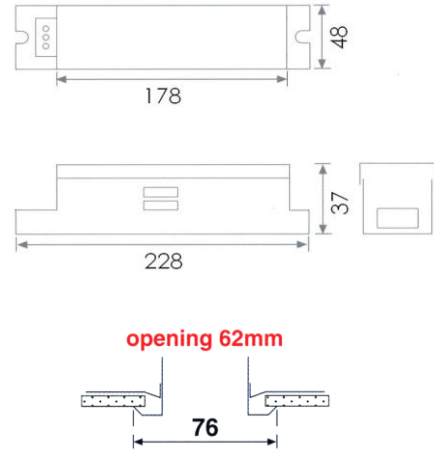

Dimensions (mm)

TECHNICAL DATA

Mode of Operation	:	Non Maintained.
Lamp	:	1 x 1 watt High Flux L.E.D. Lamp.
Operating Temperature	:	ta 40°C.
Mains Supply	:	230V AC 50/60Hz
Power Consumption	:	1VA
Battery	:	3.6V/1.25 AH Maintenance-free High Temperature NiMH. 3.6V/1.6 AH Maintenance-free High Temperature NiCad.
Charger	:	Fully automatic constant current/dual-rate.
Charging Monitor	:	Ø 5mm Red LED.
Recharge Period	:	16 hrs.
Testing Facility	:	Push-off Test-switch for independent testing.
Emergency Duration	:	2 hrs/3 hrs.
Safety Feature	:	Low-voltage cut-off to prevent over-discharge of battery.
Construction	:	Electro-galvanised steel casing; epoxy powder coating.
Flammability Class	:	Self-extinguishing.
Weight	:	0.65 kg (charger) ; 0.14 kg (disc)
Compliance	:	CP 19 ; SS263 pt.2 ; IEC 60598-2-22.
Warranty	:	1 year.



PSB Listed Label



Class 1

MODEL	LAMP APPLICABLE
LED-11NM	1 watt White L.E.D.

■ Specification subject to change without prior notice.